## **TEAC**<sub>®</sub>

## It's never been so easy to capture Medical Imaging


- Full HD 1920 x 1080 video recording
- Extreme ease of use
- Advanced Fail-safe features
- 3.5" LCD monitor for Live View, Playback or GUI



UR-4MD is TEAC's latest high-definition medical video recorder designed for quick set up and ease of use, yet includes a robust list of features and capabilities. With auto sensing video connections and automatic video resolution detection, set up is quick and easy.

The front control panel allows users to intuitively record videos and photos in crystal clear HD.

A built in hard drive is included for reliable recording, data back-up and users can also simultaneously record to USB memory and USB hard drives to archive, share and play back on other devices and locations. UR-4MD is also Network capable.

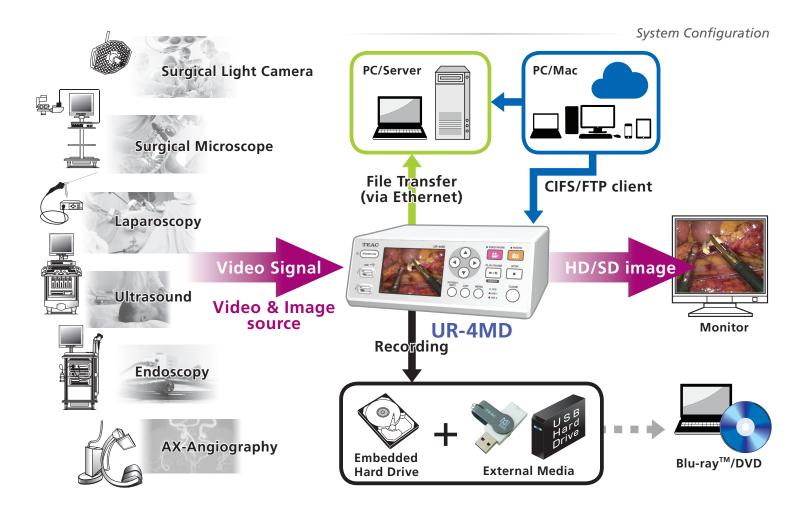

#### Features

- Intuitive & Easy To Use
- Auto-sensing detects I/O & Video Resolution " automatically "
- Wide range of **recording resolutions** 
  - 640x 480 ~ 1920x 1080 (30Hz/29.97Hz) : Undiluted recoding resolution 1920x 1200 (Resize to 1728x 1080) : Supported Input resolution
- Multiple HD & SD inputs/outputs (SDI, DVI-D, S-Video and Composite)
- Simultaneous recording to multiple media (up to 2 External USB drives & 1 Internal HD)
- Networking (FTP & CIFS) RJ45 10/100/1000 Ethernet
- Remote control, Foot-switch, Card/Barcode reader and Keyboard (Optional)
- Compliance with Medical Standards

#### Designed for the mission critical OR environment

- ✓ Fail-safe recording feature w/ the Internal Hard Drive for redundant data backup
- ✓ S.M.A.R.T. monitors/ reports Internal Hard Drive health (Self-Monitoring, Analysis and Reporting Technology)
- ✓ Safe auto-shutdown in case of power interruption
- ✓ Fluid resistant front panel

#### **Specifications**

General	USB Flash Drive	Approximate Recording Times for a 500GB Hard Drive			
Recordable Devices	USB Hard Drive		High-Definition 1920 x 1080		
	Internal Hard Drive (500GB)			1	
Display	3.5 inch LCD		12Mbps	18Mbps	24Mbps
Power supply	AC 100V - 240V 50/60Hz		90 hours	60 hours	45 hours
Operating temperature	41 to 104 deg F (5 to 40 deg C)		Standard-Definition 620 x 480		
Storage temperature	-4 to 140 deg F (-20 to 60 deg C)				
Operating humidity	5 to 80% (No condensation)		5Mbps	8Mbps	10Mbps
Dimention (W x D x H)	Approx. 8 1/4 x 9 1/4 x 3 3/8 in ( 210.5 x 235 x 88.5 mm)		180 hours	135 hours	100 hour
Weight	Approx. 5.7 lbs. (2.6 kg)				
Standards	Safety	IEC60601-1, CSA60601-1, EN60601-1			
	EMC	IEC60601-1-2, EN60601-1-2, ICES-003, FCC Class B			_
Category	FDA Class 1				-
Accessories(Optional)	Remote control unit, Foo	t-switch, Keyboard, Barcode / Card Re	eader		-
Recording Format					
Still image	Jpeg				-
Video	MPEG-4 AVC/H.264				_
Input/Output					
Input for Video	SDI (BNC) x1	High-Definition, NTSC, PAL			
	DVI (Single Link) x1	High-Definition			
	S-Video x1	NTSC, PAL			_
	Composite (BNC) x1	NTSC, PAL			
Input for Audio	SDI (BNC) x1	*SDI video input terminal use in common.			
	Stereo mini jack x2	LINE, MIC			
Output for Video	SDI (BNC) x1	High-Definition, NTSC, PAL			
	DVI (Single Link) x1	High-Definition			
	S-Video x1	NTSC, PAL			_
	Composite (BNC) x1	NTSC, PAL			
	SD/HD-SDI Thru x1	High-Definition, NTSC, PAL			
Output for Audio	SDI (BNC) x1	*SDI video output terminal use in common.			
	Stereo mini jack x1	LINE			
Other Interfaces	RJ-45 (10BASE-T / 100BASE-TX /1000BASE-T) x1				_
	USB2.0 Type A x3 USB2.0 Type B x1	2 front connectors for Recordable Devices			_
		1 rear connector for Optional Accessories			_
		1 rear connector for accessing the internal			
		Hard Drive (on UR-4MD)			_
	Stereo mini jack x3	for external trigger			

"Blu-ray<sup>™</sup> Disc", "Blu-ray<sup>™</sup>" and "Blu-ray<sup>™</sup> Disc" logo are trademarks of Blu-ray <sup>™</sup> Disc Association.

Other company names, product names and logos in this document are the trademarks or registered trademarks of their respective owners.

\*Features and specifications are subject to change without notice.

### **TEAC CORPORATION**

1-47 Ochiai, Tama-shi, Tokyo 206-8530, Japan Phone : +81-42-356-9154 FAX : +81-42-356-9185 URL : http://teacmv.jp/en/



# Image: Second second



Rear Panel 1407 PDF / ISD-042B