TEAC

4K Medical Video Recorder

UR-NEXT4K

UR-NEXT4KH (HDMI model) UR-NEXT4KS (SDI model)



Bring true-to-life 4K images to your bigger picture




60fps·3D·2ch

USB & iHDD Recording DICOM Gateway

7.0 inch Touch Display HIPAA/ GDPR



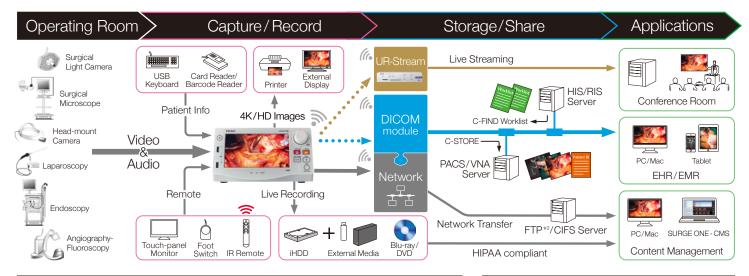

Product Overview

TEAC's UR-NEXT is the 4K and 3D/Dual Channel recording solution you have been waiting for! Now is the time to add 4K recording with workflow enhancements including intuitive touch display control, PACS/EMR integration, printing, and documentation capabilities to your OR. With UR-NEXT 4K, you can record in the latest 4K resolutions, AND support Full HD recording from any surgical camera or visualization system for complete backward compatibility- perfect if you have 4K now or are planning to transition to 4K in the future. The touchscreen user interface also features the use of a multifunctional jog dial for a truly simple and efficient user control experience. Paired with TEAC's unmatched reliability and quality, UR-NEXT 4K is the ultra-clear choice.

Specifications

| | | UR-NEXT4KH (HDMI model) | UR-NEXT4KS (SDI model) | | | | |
|-----------------------------|--------------------|--|--|--|--|--|--|
| Storage & Disp | lay | | | | | | |
| Front LCD Mon | nitor | 7-inch Touch Display | | | | | |
| nternal Media | | HDD 2TB | | | | | |
| Data Storage | External Media*1 | USB HDD / SSD / Flash Memory / DVD / Blu-ray™ Disc | | | | | |
| Recording | | | | | | | |
| Video Resolution | | 4K/4096x2160p, UHD/3840x2160, Full HD/1920x1080p, 720p, NTSC/PAL (Digital) | | | | | |
| Frame Rate | | 60Hz, 30Hz | | | | | |
| Multi-input mode | | Dual-channel, 3D, PIP, PBP, Toggle*2 | | | | | |
| 2D made | Input | Line by Line, Side by Side, Top and Bottom, Dual Stream | | | | | |
| 3D mode | Output | Side by Side, Top and Bottom | | | | | |
| Recording Form | mat | | | | | | |
| Video & Audio | Compression | H.264, H.265-HEVC, AAC | | | | | |
| Video & Audio | File | MP ² | 4, TS | | | | |
| Photo | Compression | JPEG, PNG, L | Jncompressed | | | | |
| PHOLO | File | JPG, Pľ | NG, TIFF | | | | |
| Interfaces | | | | | | | |
| | HDMI® | Type A x (2) | - | | | | |
| Video Input | SDI | - | BNC x (4) 12G x (1), 6G x (1), 3G x (2) | | | | |
| \ | HDMI® | Type A x (1) | | | | | |
| Video Output | DP | Display Port x (1) | | | | | |
| Audio Input | | MIC (3.5mm stereo mini jack), HDMI | MIC (3.5mm stereo mini jack), SDI | | | | |
| Audio Output | | Line (3.5mm s | tereo mini jack) | | | | |
| LICD Dowto | Front | USB3.2 Type A x | (2) for Recording | | | | |
| USB Ports | Rear | USB3.2 Type A x (4) for Accessories*3 | | | | | |
| Remote Control | | IR Hand-held Remote (Included) | | | | | |
| Serial Communication | | D-sub 9 pin (RS-232C) | | | | | |
| LAN | | RJ-45 (1000BASE-T/100BASE) | | | | | |
| External Trigge | | 3.5mm Stereo Mini Jack x (2) | | | | | |
| Wireless Conne | ectivity | IEEE 802.11a/b/g/n/ac, Bluetooth®5.0 | | | | | |
| General | | | | | | | |
| Power supply | | AC 100V-230V, 50/60Hz | | | | | |
| Dimensions (W | xHxD) | Approx. 239 x 137.0 (132.3) x 245 mm / 9.4 x 5.4 (5.2) x 9.6 inch | | | | | |
| Weight | | Approx. 4.3kg / 9.5 lbs. | | | | | |
| | Operating temp. | 5°C to 40°C / 41°F to 104°F | | | | | |
| Environments | Operating humidity | 30 to 80% RH (no condensation) | | | | | |
| | Storage temp. | -10°C to 60°C / 14°F to 140°F | | | | | |
| Certifications / Compliance | | ANSI/AAMI ES60601-1, CAN/CSA-C22.2 NO.60601, CE MDR, IEC60601-1, EN60601-1, EN60601-1-2, FCC Class A, FDA Class 1, RoHS | | | | | |
| | | Foot-switch, USB Keyboard, USB DVD/BD Writer | | | | | |

Key Features

- 4K60 Video/Photo Recording
- 4K3D Video/Photo Recording
- 4K Dual-channel (4K30fps x 2) Video Recording
- Intuitive Jog-Dial & Touch LCD user-interface
- 2TB built-in HDD stores hundreds of hours of videos
- Wi-Fi® transfer within the secured hospital network
- Wide variety of recording medium of your choice (USBs, DVD/Blu-ray™, NAS, PACS, VNA)

Recording Times (for a 2TB Hard Drive)**

| Ultra High-Definition 3840 x 2160p 60fps | | | | Full High-Definition 1920 x 1080p 60fps | | | |
|--|-------------|------------|------------|--|------------|------------|-----------|
| 150M bps | 100M bps | 50M bps | 25M bps | 50M bps | 20M bps | 12M bps | 8M bps |
| 29 hrs | 44 hrs | 88 hrs | 176 hrs | 88 hrs | 222 hrs | 370 hrs | 555 hrs |

4K Medical Video Recorder

UR-NEXT**4K**





Remote



UR-NEXT4KH (HDMI model)



UR-NEXT4KS (SDI model)

*1 Optional:Sold separately. Please contact us for recommendations. *2 Those functions will be supported by future firmware update. *3 HID-compliant External Touchscreens are supported. *4 Times are approximate.

TEAC America, Inc.,

10410 Pioneer Blvd. #1 Santa Fe Springs, CA 90670, U.S.A. Tel.: +1-323-726-0303 Fax: +1-323-727-7688 Email: mrsales@teac.com https://teacmv.jp/en/



Wi-Fi® is a registered trademark of Wi-Fi Alliance®. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. Blu-ray Disc™, Blu-ray™ and the logos are trademarks of Blu-ray Disc Association. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG,Inc. and any use of such marks by TEAC CORPORATION is under license. Other trademarks and trade names are those of their respective owners. Features and specifications are subject to change without notice.