

4K Medical Video Recorder




UR-NEXT4KH (HDMI model) UR-NEXT4KS (SDI model)

Do More, Record More, Bring true-to-life 4K images to your bigger picture





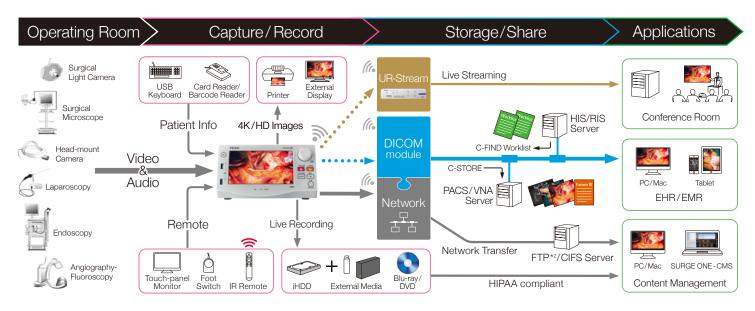

Product Overview

TEAC'S UR-NEXT is the 4K and 3D/Dual Channel recording solution you have been waiting for! Now is the time to add 4K recording with workflow enhancements including intuitive touch display control, PACS/EMR integration, printing, and documentation capabilities to your OR. With UR-NEXT 4K, you can record in the latest 4K resolutions, AND support Full HD recording from any surgical camera or visualization system for complete backward compatibility- perfect if you have 4K now or are planning to transition to 4K in the future. The touchscreen user interface also features the use of a multifunctional jog dial for a truly simple and efficient user control experience. Paired with TEAC's unmatched reliability and guality, UR-NEXT4K is the ultra-clear choice.

Specifications

		UR-NEXT4KH (HDMI model)	UR-NEXT4KS (SDI model)
Storage & Disp	lay		
Front LCD Monitor		7-inch Touch Display	
Data Storage	Internal Media	HDD 2TB	
	External Media*1	USB HDD / SSD / Flash Memory / DVD / Blu-ray™ Disc	
Recording			
Video Resolution		4K/4096x2160p, UHD/3840x2160, Full HD/1920x1080p, 720p, NTSC/PAL (Digita	
Frame Rate		60Hz, 30Hz	
Multi-input mode		Dual-channel, 3D, PIP, PBP, Toggle*2	
3D mode	Input	Line by Line, Side by Side, Top and Bottom, Dual Stream	
	Output	Side by Side, Top and Bottom	
Recording For	nat		
Video & Audio	Compression	H.264, H.265-HEVC, AAC	
	File	MP4, TS	
Photo	Compression	JPEG, PNG, Uncompressed	
	File	JPG, PNG, TIFF	
Interfaces			
Video Input	HDMI®	Type A x (2)	-
	SDI	_	BNC x (4) 12G x (1), 6G x (1), 3G x (2)
Video Output	HDMI®	Type A x (1)	
	DP	Display Port x (1)	
Audio Input		MIC (3.5mm stereo mini jack), HDMI	MIC (3.5mm stereo mini jack), SDI
Audio Output		Line (3.5mm stereo mini jack)	
USB Ports	Front	USB3.2 Type A x (2) for Recording	
	Rear	USB3.2 Type A x (4) for Accessories*3	
Remote Control		IR Hand-held Remote (Included)	
Serial Communication		D-sub 9 pin (RS-232C)	
LAN		RJ-45 (1000BASE-T/100BASE)	
External Trigger		3.5mm Stereo Mini Jack x (2)	
Wireless Connectivity		IEEE 802.11a/b/g/n/ac, Bluetooth®5.0	
General			
Power supply		AC 100V-230V, 50/60Hz	
Dimensions (WxHxD)		Approx. 239 x 137.0 (132.3) x 245 mm / 9.4 x 5.4 (5.2) x 9.6 inch	
Weight		Approx. 4.3kg / 9.5 lbs.	
Environments	Operating temp.	5°C to 40°C / 41°F to 104°F	
	Operating humidity	30 to 80% RH (no condensation)	
	Storage temp.	-10°C to 60°C / 14°F to 140°F	
Certifications / Compliance		ANSI/AAMI ES60601-1, CAN/CSA-C22.2 NO.60601, CE MDR, IEC60601-1, EN60601-1, EN60601-1-2, FCC Class A, FDA Class 1, RoHS	
Accessories*1		Foot-switch, USB Keyboard, USB DVD/BD Writer	

Key Features

- 4K60 Video/Photo Recording
- 4K3D Video/Photo Recording
- 4K Dual-channel (4K30fps x 2) Video Recording
- Intuitive Jog-Dial & Touch LCD user-interface
- 2TB built-in HDD stores hundreds of hours of videos
- Wi-Fi[®] transfer within the secured hospital network
- Wide variety of recording medium of your choice (USBs, DVD/Blu-ray™, NAS, PACS, VNA)

Recording Times (for a 2TB Hard Drive)**



4K Medical Video Recorder



TEAC CORPORATION

1-47 Ochiai, Tama-shi, Tokyo 206-8530, Japan Tel: +81-42-356-9154 E-mail: cs_ipd@teac.jp Web: https://teacmv.jp/en/

Wi-Fi[®] is a registered trademark of Wi-Fi Alliance[®]. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. Blu-ray Disc[™], Blu-ray TM and the logos are trademarks of Blu-ray Disc Association. The Bluetooth' word mark and logos are registered trademarks owned by Bluetooth SIG.Inc. and any use of such marks by TEAC CORPORATION is under license. Other trademarks and trade names are those of their respective owners. Features and specifications are subject to change without notice.

© Copyright TEAC CORPORATION 2023 2312 TCJ-PDF / ISD-185F