

TEAC



One size DOES fit ALL
Pure Recording & True Integration, Simplified




Built with a purpose

UR-Xi



Quality you can trust

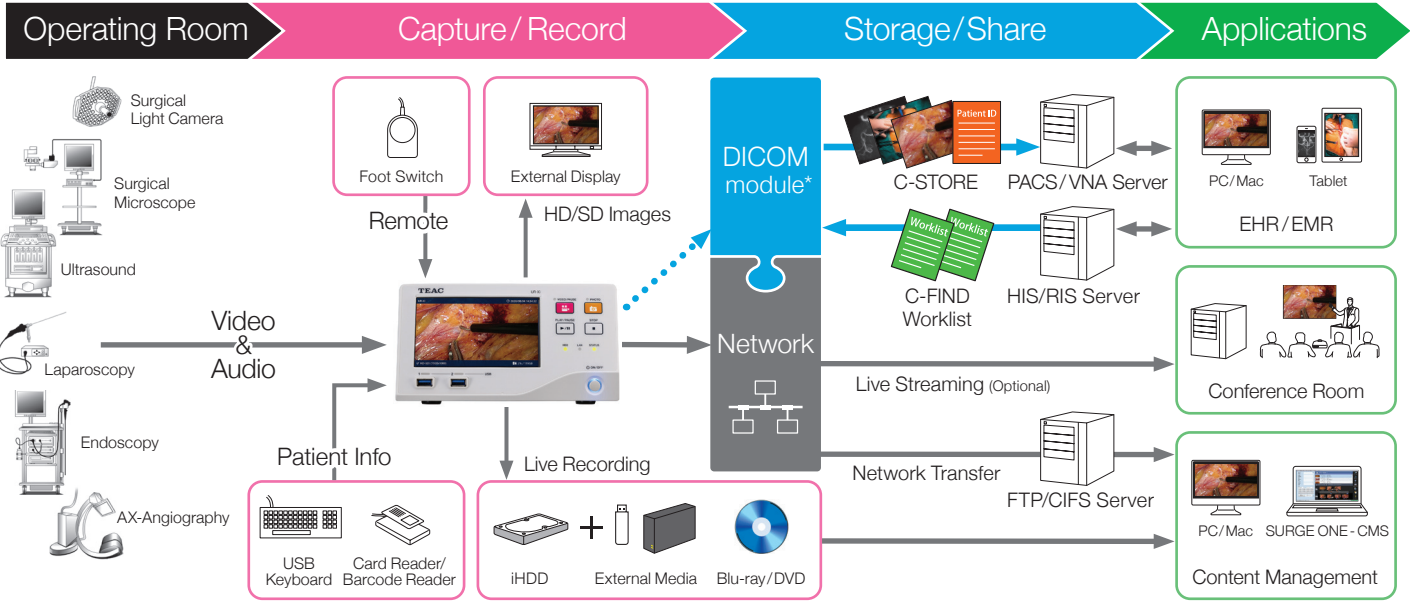

Product Overview

Today, medical video recording is more relevant across all surgical fields. While it has become more approachable than ever before, understanding all the many factors involved in the setup can still be overwhelming. The variations in modality, camera system, hardware and software can create a barrier to getting started. With **TEAC's new UR-Xi** all-in-one system, ease of use is as easy as 1-2-3, operability and connectivity are greatly enhanced without adding complexity. Video Recording/Live Streaming/Editing/Transferring to any PACS-VNA-EMR and other features can be easily and readily deployed to fit your workflow and documentation needs. Having truly dependable and high-quality solutions for medical video management, allowing surgeons and clinicians to capture **WHAT** matters, **WHEN** it matters, is **TEAC's mission**.

Recording Times (for a 1TB Hard Drive)*

High-Definition 1920 x 1080p 60fps				Standard-Definition 720 x 480			
20Mbps	15Mbps	10Mbps	5Mbps	8Mbps	6Mbps	4Mbps	2Mbps
111 hrs	148 hrs	222 hrs	444 hrs	278 hrs	370 hrs	556 hrs	1,111 hrs

Specifications

Storage & Display		
Recordable Devices	Internal Hard Drive (1TB), USB Flash Drive, USB Hard Drive	
Built-in LCD Display	5-inch Touch Panel (Resistive type)	
Recording Format		
Video	H.264 (Video), AAC (Audio) mts	
Photo	JPEG, Uncompressed JPG, TIFF	
Input/Output		
Video	SDI (BNC)	3G-SDI, HD-SDI, SD-SDI
	DVI**	1920x1200*, 1920x1080(1080-60p/59.94i), 1280x960, 1024x768
	Analog HDTV (DVI-I**)	1920x1080 (1080-59.94i)
	S-Video	NTSC
	Composite (BNC)	NTSC
Audio	RGB (DVI-I**)	525-60i
	Stereo mini	MIC (Input only), LINE
Other Interfaces	RS-232C	D-sub 9 pin
	LAN	RJ-45 (1000BASE-T, 100BASE-TX, 10BASE-T)
	USB3.0	USB Type-A x 2 on front (for Recordable Devices)
	USB2.0	USB Type-A x 4 on rear (for Accessories)
	External contact switch	Stereo Mini jack x 3
General		
Power supply	AC 100V-230V, 50/60Hz	
Dimensions (WxHxD)	Approx. 202 x 114 x 337 mm / 8.0 x 4.5 x 13.3 inch	
Weight	Approx. 3.7 kg / 8.2 lbs.	
Environments	Operating temperature range	5°C to 40°C / 41°F to 104°F
	Operating humidity range	30 to 80% RH (no condensation)
	Storage temperature range	-10°C to 60°C / 14°F to 140°F
Certifications / Compliance	ANSI/AAMI ES60601-1, CAN/CSA-C22.2 NO.60601, CE MDR IEC60601-1, EN60601-1, EN60601-1-2, FCC Class A, FDA Class 1, RoHS	
Accessories (Optional)	Foot-switch, Keyboard, Barcode Reader, Card Reader	

*1 Input/output terminal is used common to DVI-I. *2 1920 x 1200 video recording is resized to 1728 x 1080.

Key Features



- Real-time Recording x Live Streaming
- One-touch operation x Built-in Touch Screen
- PACS/EMR Integration x Robust Security
- More Connectivity x More Recording Media



Blu-ray™ is a trademark of the Blu-ray Disc Association. Other company names, product names and logos in this document are the trademarks or registered trademarks of their respective owners. * Features and specifications are subject to change without notice.

TEAC America, Inc.,

10410 Pioneer Blvd. #1 Santa Fe Springs, CA 90670, U.S.A.
 Tel.: +1-323-726-0303 Fax: +1-323-727-7688
 Email: mrsales@teac.com https://teacmv.jp/en/